

## Diode Pumped Solid State Laser Module

### Key Features:

- ◆ 266nm UV laser
- ◆ Stabilized Pulse Control
- ◆ High Rep. Rate
- ◆ High Peak Power
- ◆ ESD protection
- ◆ Plug & Play

### Applications:

- ◆ Bio Technology
- ◆ Photo Finishing
- ◆ Semiconductor Instrument
- ◆ Medical Instrument
- ◆ Scientific Research



### Specifications:


|   |                                  |
|---|----------------------------------|
| <b>Wavelength</b>                       | 266+/-1nm                        |
| <b>Average Output power*</b>            | 1mW ~ 200mW                      |
| <b>Output stability</b>                 | 10% standard, 5% optional        |
| <b>Single Pulse Energy</b>              | 0.1 ~ 10uJ                       |
| <b>Peak Power</b>                       | Up to 450kW                      |
| <b>Transverse beam mode</b>             | Near TEM <sub>00</sub>           |
| <b>Rep. Rate</b>                        |                                  |
| For Average Power <30mW                 | Up to 5KHz with stabilized pulse |
| For Average Power 50mW ~ 200mW          | 5 ~ 20KHz unstabilized pulse     |
| <b>Pulse Duration</b>                   |                                  |
| For Average Power <30mW                 | ~7ns                             |
| For Average Power 50mW ~ 200mW          | ~10ns                            |
| <b>Beam Diameter (1/e<sup>2</sup>)</b>  | ~2mm                             |
| <b>Polarization Ratio</b>               | >100:1                           |
| <b>Pointing Stability After Warm Up</b> | <0.05mrad                        |
| <b>Beam height from base</b>            |                                  |
| < 30mW                                  | 45mm                             |
| 50mW ~ 200mW                            | 93.5mm                           |

**Diode Pumped Solid State Laser Module**

|  |  |
|--|--|
| <b>Operating temperature</b>             | 10~35 degree C ( laser case)                   |
| <b>Warm up time</b>                      | < 15minutes                                    |
| <b>Expected lifetime</b>                 | 10,000hours                                    |
| <b>Mechanical Dimensions(laser head)</b> |  |
| < 30mW                                   | 211.3mm(L)X88mm(W)X74mm(H)                     |
| 50m ~ 200mW                              | 333mm(L)X140mm(W)X125mm(H)                     |
| <b>Warranty</b>                          | 1 year from the date ship out from out factory |


\* Average Power(mW)=Single pulse energy(uJ) X Rep rate(KHz)

**Mechanical Dimension of Laser Head with power <30mW:**

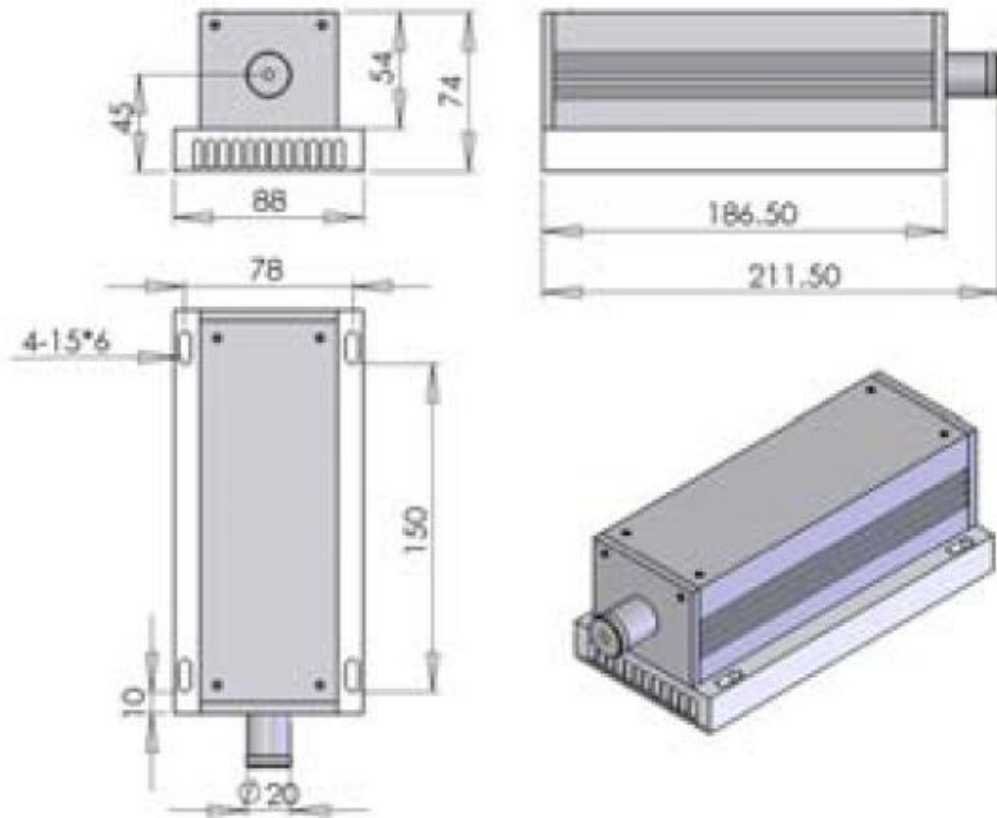


**Mechanical Dimension of Laser Driver with power <30mW:**

**Diode Pumped Solid State Laser Module**

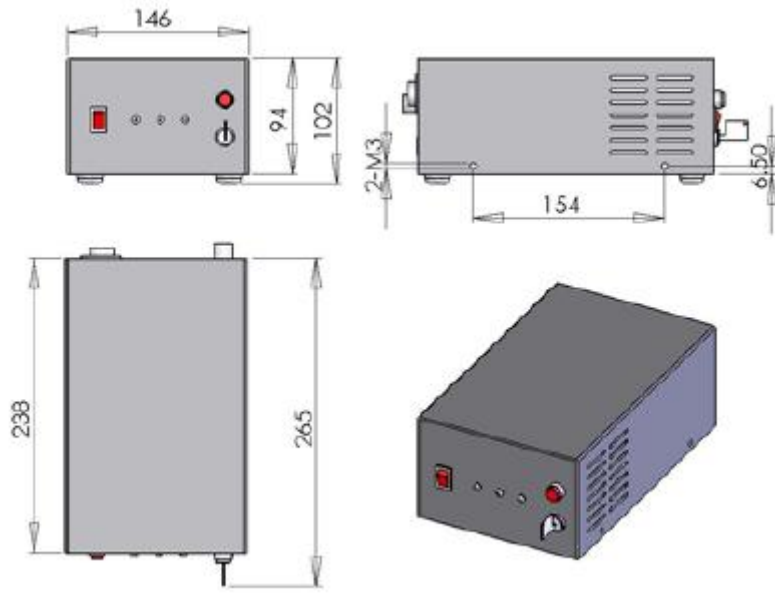


**Mechanical Dimension of Laser Head with power 50mW ~ 200mW:**

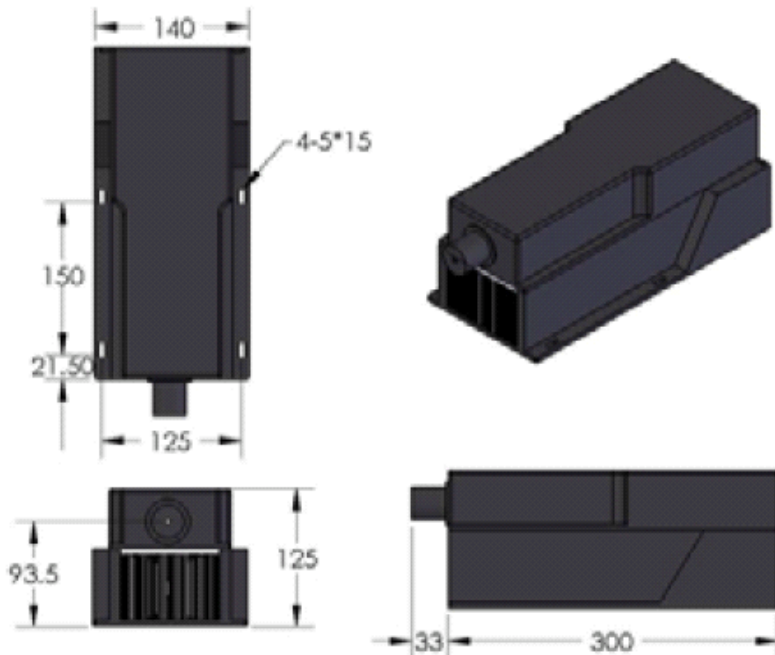

**Mechanical Dimension of Laser Driver with power 50mW~200mW:**

**Diode Pumped Solid State Laser Module**

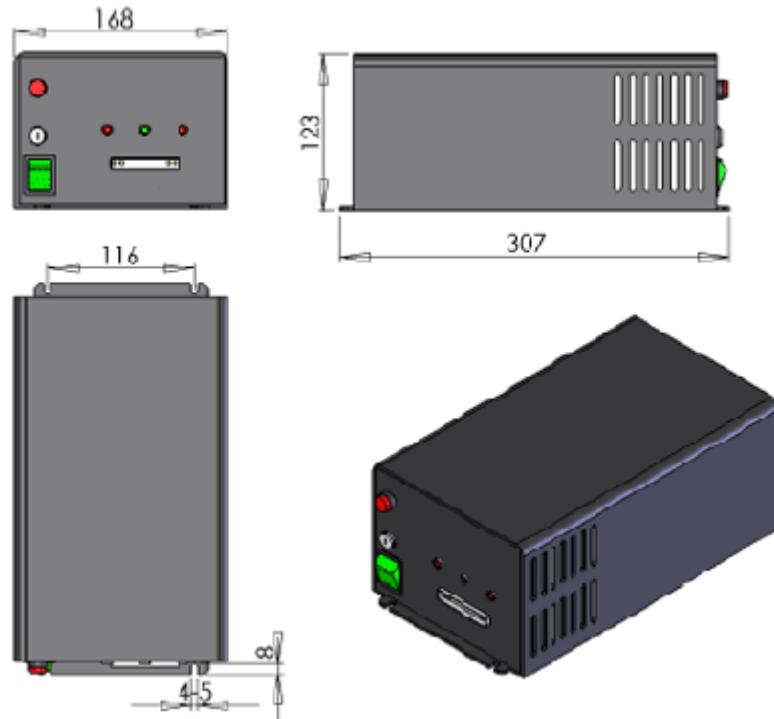

This component does not comply with the Federal Regulations (21 CFR Sub chapter 1) as administered by the Center for Devices and Radiological health. Purchaser acknowledges that his/her products must comply with these regulations before they can be sold to a customer. The output light from this product is harmful to a human body even if it is invisible. Avoid looking at the output of this product directly, or through a lens during operation. Observance of operation should be through a TV camera or related equipment. Refer to IEC 825-1 and 21 CFR 1040.10-1040.11 as a radiation safety standard for laser products.

RgBLase LLC follows a policy of continuous product improvement. Specifications are subject to change without notice.